


Corrugated Switchboard Mat Custom 3' Roll

FLM191 Not for Chemical Contact, For Light Oil/Grease Splash, 3' x .25"

Roll out this floor mat around electronics to improve footing & insulate against charges up to 30,000 volts.

- Deep corrugated vinyl surface provides safe footing and insulates against charges up to 30,000 volts
- .25" thick construction won't create a tripping hazard
- Conforms to ANSI/ASTM D-178-93 Type 2, Class II standards
- Ozone- and flame-resistant
- Custom length lets your mat match your workplace with clean, factory-cut edges

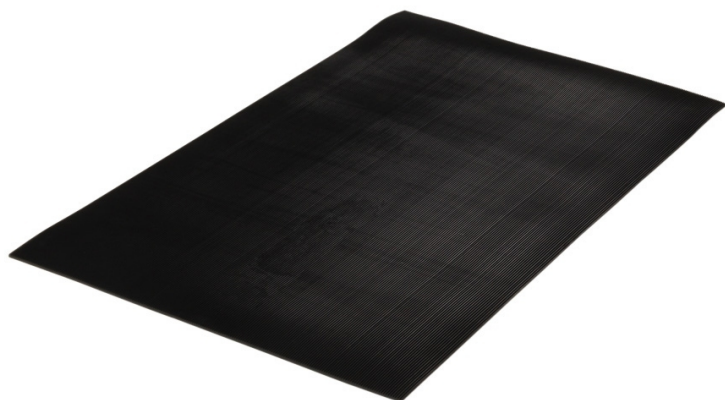

CROWN

Specifications

Dimensions	3' W x .25" H
Chemical Contact	Not for Chemical Contact
Oil/Grease Contact	For Light Oil/Grease Splash
Application	Dry Applications
Anti-Slip	Yes
Beveled Edge	No
Color	Black
Brand	Crown
Drainage Holes	Without Holes
Grit Surface	No
Safe for Welding Areas	No
Static-Dissipative	No
Sold as	1 each
Weight	5 lbs.
# per Pallet	8

Composition

Vinyl

UNSPSC

52101510

Pigalog® Page NumberPage 237**Metric Equivalent****Dimensions**

91.4cm W x 6.4mm H

Weight

2.3 kg

Technical Information**Certifications, Approvals and Ratings**

ANSI / ASTM D-178-93 Type 2, Class II Standards

**New Pig**

World's best stuff for leaks, drips and spills.

One Pork Avenue • Tipton, PA 16684-03041-855-493-4647 • Fax: 1-800-621-7447 • newpig.com • hothogs@newpig.com