


# Diamond Sof-Tred™ Anti-Fatigue Mat 3' x 5'

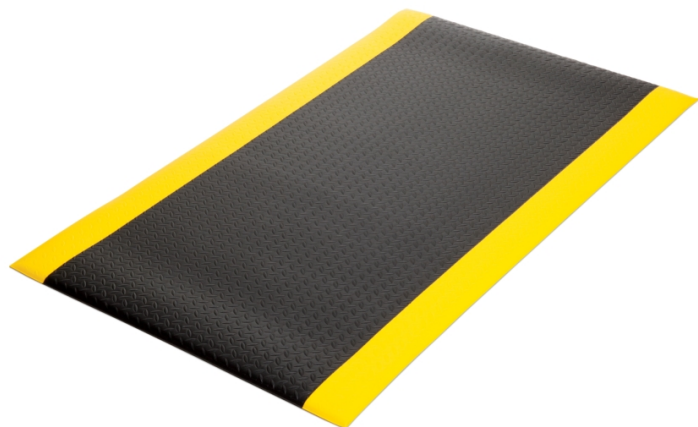

FLM271 Not for Chemical Contact, Not for Oil/Grease Contact, 3' x 5' x .5"

Diamond plate-embossed mat features urethane top to seal out moisture and optional molded-in yellow border for extra visibility.

- Closed-cell PVC sponge mat is .5" thick to relieve leg and back fatigue
- Durable, abrasion-resistant Dyna-Shield urethane top coating seals out moisture and extends mat life
- Diamond-embossed surface provides traction and enables easy cleanup
- Beveled edges help reduce tripping hazard



## Specifications

<b>Dimensions</b>	3' W x 5' L x .5" H
<b>Chemical Contact</b>	Not for Chemical Contact
<b>Oil/Grease Contact</b>	Not for Oil/Grease Contact
<b>Application</b>	Dry Applications
<b>Anti-Slip</b>	Yes
<b>Beveled Edge</b>	Yes
<b>Brand</b>	NoTrax
<b>Drainage Holes</b>	Without Holes
<b>Grit Surface</b>	No
<b>Safe for Welding Areas</b>	No
<b>Static-Dissipative</b>	No
<b>Distributor Part Number</b>	4344697;04088x39842
<b>Sold as</b>	1 each
<b>Weight</b>	18 lbs.
<b># per Pallet</b>	48
<b>Composition</b>	Top Coat - Urethane Cushion - Closed-Cell PVC Sponge
<b>UNSPSC</b>	52101510

## Metric Equivalent

### Dimensions

91.4cm W x 152.4cm L x 12.7mm H

### Weight

8.2 kg

## Technical Information

### Technical Documents

NoTrax® Floor Matting



**New Pig**

World's best stuff for leaks, drips and spills.

**One Pork Avenue • Tipton, PA 16684-0304**

1-855-493-4647 • Fax: 1-800-621-7447 • [newpig.com](http://newpig.com) • [hothogs@newpig.com](mailto:hothogs@newpig.com)