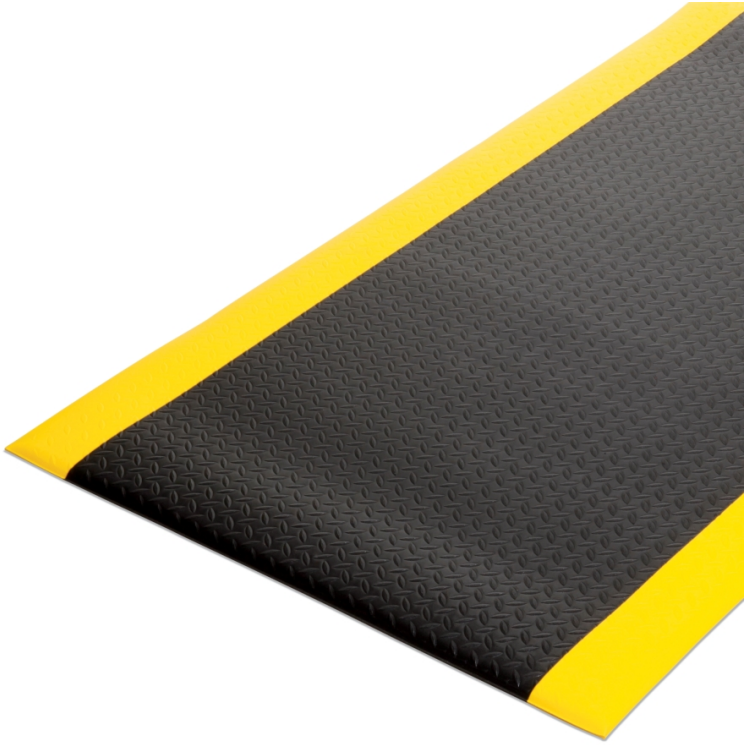

# Diamond Sof-Tred™ Anti-Fatigue Mat Custom 4' Roll

FLM274 Not for Chemical Contact,Not for Oil/Grease Contact,4' x 0.5"

Diamond plate-embossed mat features urethane <omit>top</omit> to seal out moisture.

- Closed-cell PVC sponge mat is .5" thick to relieve leg and back fatigue
- Durable, abrasion-resistant Dyna-Shield urethane top coating seals out moisture and extends mat life
- Diamond-embossed surface provides traction and enables easy cleanup
- Beveled edges help reduce tripping hazard
- Custom length lets your mat match your workplace with clean, factory-cut edges

| Item# | Description | Dimensions | Weight |
|---|---|---|---|
| FLM274-BWY-CLR | | 4' W x .5" H | 4.8 lbs. |

## Metric Equivalent:

| Item# | Description | Dimensions | Weight |
|---|---|---|---|
| FLM274-BWY-CLR | | 121.9cm W x 12.7mm H | 2.2 kg |

## Specifications

| | |
|---|---|
| **Style** | Custom-Cut |
| **Dimensions** | 4' W x .5" H |
| **Chemical Contact** | Not for Chemical Contact |
| **Oil/Grease Contact** | Not for Oil/Grease Contact |
| **Application** | Dry Applications |
| **Anti-Slip** | Yes |
| **Beveled Edge** | Yes |
| **Brand** | NoTrax |
| **Drainage Holes** | Without Holes |
| **Grit Surface** | No |
| **Safe for Welding Areas** | No |
| **Static-Dissipative** | No |
| **Distributor Part Number** | 3362653;04088x90013 |

| | |
|---|---|
| **Sold as** | 1 each |
| **Weight** | 4.8 lbs. |
| **# per Pallet** | 16 |
| **Composition** | Top Coat - Urethane<br>Cushion - Closed-Cell PVC Sponge |
| **UNSPSC** | 52101510 |

## Metric Equivalent

| | |
|---|---|
| **Dimensions** | 121.9cm W x 12.7mm H |
| **Weight** | 2.2 kg |

## Technical Information

**Technical Documents**

NoTrax® Floor Matting

New Pig
World's best stuff for leaks, drips and spills.

**One Pork Avenue • Tipton, PA 16684-0304**
1-855-493-4647 • Fax: 1-800-621-7447• newpig.com • hothogs@newpig.com