


Niru® Cushion-Ease® GSII™ Modular Anti-Fatigue Mat with Holes

FLM812 For Heavy Chemical Contact, For Heavy Oil/Grease Contact, 5' x 3' x 0.75"

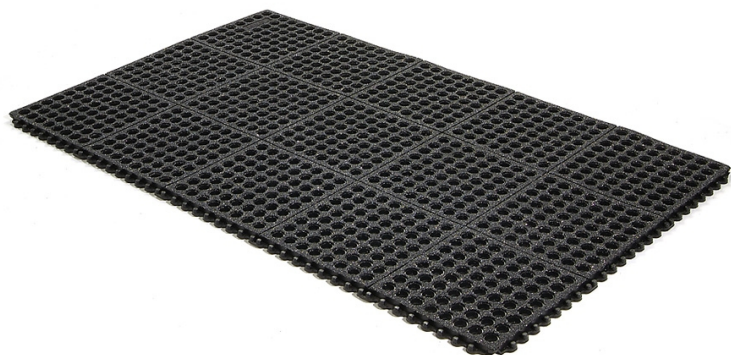

Interlocking mats with non-slip silicon carbide surface help provide a safe, comfortable surface in wet areas.

- Increase safety and comfort in harsh, slippery environments where industrial chemicals, oils and greases are commonly used
- 100% nitrile construction provides comfort and resistance to chemicals, oils and grease
- Modular design makes it easy to replace individual sections and customize configurations
- Assembles easily with built-in connectors and channels that fit together without hammering
- Silicon carbide grit bonded permanently to pure nitrile provides long-lasting, non-slip traction
- Add ramps (sold separately) for safer transitions and a neat, finished appearance
- Mat with drainage holes channels liquids away from workers' feet to help prevent slips and falls



Item#	Description	Dimensions	Weight
FLM812-BK		5' W x 3' L x .75" H	42 lbs.

Metric Equivalent:

Item#	Description	Dimensions	Weight
FLM812-BK		152.4cm W x 91.4cm L x 1.9cm H	19.1 kg

Specifications

Style	Modular
Dimensions	5' W x 3' L x .75" H
Chemical Contact	For Heavy Chemical Contact
Oil/Grease Contact	For Heavy Oil/Grease Contact
Application	Wet Applications
Anti-Slip	Yes
Beveled Edge	No
Brand	NoTrax

Drainage Holes	With Holes
Grit Surface	Yes
Safe for Welding Areas	No
Static-Dissipative	No
Distributor Part Number	5781653;04088x90592
Sold as	1 each
Weight	42 lbs.
# per Pallet	36
Composition	Nitrile Rubber
UNSPSC	52101510
Pigalog® Page Number	Page 234

Metric Equivalent

Dimensions	152.4cm W x 91.4cm L x 1.9cm H
Weight	19.1 kg

Technical Information

Technical Documents

[NoTrax® Floor Matting](#)



One Pork Avenue • Tipton, PA 16684-0304

1-855-493-4647 • Fax: 1-800-621-7447 • newpig.com • hothogs@newpig.com