


Notrax® Lok-Tyle™ Modular Draining Anti-Fatigue Mat

FLM845 For Light Chemical Splash, For Light Oil/Grease Splash, 12" x 12" x 0.5"

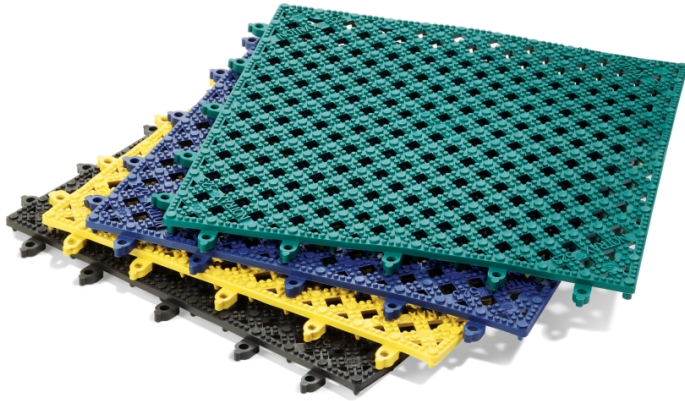

Chemical-resistant, interlocking tiles with drainage holes snap together so you can customize lightweight anti-fatigue mats in work areas where liquids are present.

- Boost safety and comfort in light-duty applications where anti-slip coverage is needed
- 100% recycled PVC compound provides the highest degree of chemical resistance (black only)
- Interlock system makes it easy to customize your work area and replace individual tiles as needed
- Lightweight design allows for additional use as shelf liners in bar or food prepping areas
- Assembles easily with built-in connectors, then stays in place during use
- Open-grid diamond pattern provides drainage and traction in wet working conditions
- Comes in a variety of colors to fit any environment
- Add ramps and corners (sold separately) for safer transitions and a neat, finished appearance
- Place PIG Absorbent Mats (sold separately) underneath to increase safety and reduce slips, trips and falls



Item#	Description	Dimensions	Weight
FLM845-BK	Black	12" W x 12" L x 0.5" H	1 lb.
FLM845-BL	Blue	12" W x 12" L x 0.5" H	1 lb.
FLM845-GR	Green	12" W x 12" L x 0.5" H	1 lb.
FLM845-YW	Yellow	12" W x 12" L x 0.5" H	1 lb.

Metric Equivalent:

Item#	Description	Dimensions	Weight
FLM845-BK	Black	30.5cm W x 30.5cm L x 12.7mm H	.5 kg
FLM845-BL	Blue	30.5cm W x 30.5cm L x	.5 kg

		12.7mm H	
FLM845-GR	Green	30.5cm W x 30.5cm L x 12.7mm H	.5 kg
FLM845-YW	Yellow	30.5cm W x 30.5cm L x 12.7mm H	.5 kg

Specifications

Static-Dissipative	No
Drainage Holes	With Holes
Anti-Slip	Yes
Dimensions	12" W x 12" L x 0.5" H
Chemical Contact	For Light Chemical Splash
Oil/Grease Contact	For Light Oil/Grease Splash
Recycled Content	100% Post-Industrial Recycled PVC
Beveled Edge	Yes
Brand	NoTrax
Grit Surface	Yes
Safe for Welding Areas	No
Sold as	1 each
Weight	1 lb.
Composition	100% Recycled PVC (Black Tiles Only)
Application	Wet Applications
UNSPSC	52101510
Pigalog® Page Number	Page 242

Metric Equivalent

Dimensions	30.5cm W x 30.5cm L x 12.7mm H
Weight	.5 kg

Technical Information

Technical Documents

NoTrax® Floor Matting

[Instructions for NoTrax Modular Lok-Tyle \(INST_FLM845/846/847.pdf\)](#)



One Pork Avenue • Tipton, PA 16684-0304

1-855-493-4647 • Fax: 1-800-621-7447 • newpig.com • hothogs@newpig.com

