



# NoTrax® Diamond Flex-Lok™ Modular Anti-Fatigue Mat

FLM851 For Heavy Chemical Contact, For Heavy Oil/Grease Contact, 12" x 12" x 0.75"

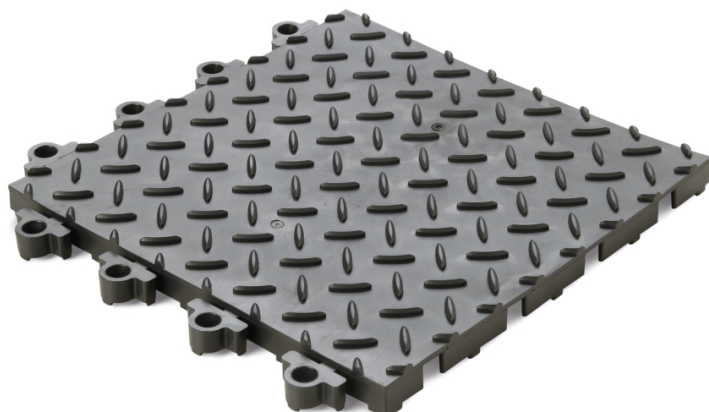

Interlocking, non-draining tiles with solid-top, diamond-pattern tread snap together so you can build custom-sized anti-fatigue mats for safety and comfort in dry work areas.

- Boost safety and comfort in tough environments where industrial chemicals, oils and greases may come into contact with your mat
- 100% recycled PVC compound provides the highest degree of chemical resistance
- Interlock system makes it easy to customize your anti-fatigue mat and replace individual tiles as needed
- Assembles easily with built-in connectors, then stays in place during use
- Diamond-embossed surface provides excellent traction in dry working conditions
- Add ramps and corners (sold separately) for safer transitions and a neat, finished appearance



NoTrax

## Specifications

Static-Dissipative	No
Drainage Holes	Without Holes
Anti-Slip	Yes
Color	Black
Dimensions	12" W x 12" L x 0.75" H
Chemical Contact	For Heavy Chemical Contact
Oil/Grease Contact	For Heavy Oil/Grease Contact
Recycled Content	100% Post-Industrial Recycled PVC
Beveled Edge	No
Brand	NoTrax
Grit Surface	Yes
Safe for Welding Areas	No
Sold as	1 each
Weight	2 lbs.

<b>Composition</b>	100% Recycled PVC
<b>Application</b>	Dry Applications
<b>UNSPSC</b>	52101510
<b>Pigalog® Page Number</b>	<u>Page 242</u>

## Metric Equivalent

<b>Dimensions</b>	30.5cm W x 30.5cm L x 1.9cm H
<b>Weight</b>	.9 kg

## Technical Information

### Technical Documents

NoTrax® Floor Matting



**One Pork Avenue • Tipton, PA 16684-0304**

1-855-493-4647 • Fax: 1-800-621-7447 • [newpig.com](http://newpig.com) • [hothogs@newpig.com](mailto:hothogs@newpig.com)