
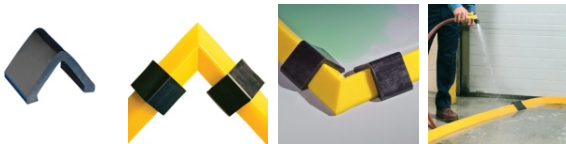


Dike Connector

PLR205 For SpillBlocker Dike, 1 each

Connector creates a leakproof joint between two SpillBlocker Dikes.

- Add this handy connector piece to a pair of SpillBlocker Dikes for a liquid-proof seal
- Create any length to suit your application or environment
- Use with your straight sections or optional 90-degree corner piece (PLR206)

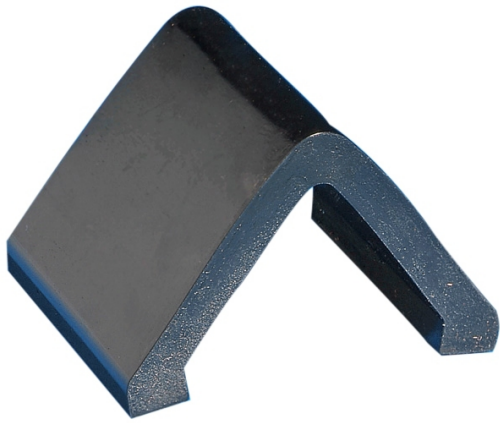

Specifications

Use With	SpillBlocker Dike
Dimensions	5.5" W x 4" L x 2.25" H
Barrier Height	2.25" H
Brand	PIG
Max liquid temp exposure	Max Exposure Limit 225°F for up to 30 Minutes
Temperature Limit	Works from 0°F to 160°F
Color	Black
Sold as	1 each
Weight	1 lb.
Composition	Polyurethane
UNSPSC	24101907
Pigalog® Page Number	Page 155

Metric Equivalent

Weight	.5 kg
Dimensions	14cm W x 10cm L x 5.7cm H

Technical Information

Technical Documents

PIG SpillBlocker Dikes, DrainBlocker Drain Covers and other Blockers

Urethane Use, Care and Storage

PIG® Blocker Family

40 CFR 112.7

40 CFR 122.26



New Pig

World's best stuff for leaks, drips and spills.

One Pork Avenue • Tipton, PA 16684-0304

1-855-493-4647 • Fax: 1-800-621-7447 • newpig.com • hothogs@newpig.com