


## Sili-Thane™ 803 Sealant

PTY340 For Metals, Masonry, Glass, Plastics & Wood, 6 - 10.3 fl. oz. Cartridges, 6 each

Polyether-based adhesive offers superior sealing properties and flexibility.

- Excellent for creating flexible, liquidtight seals when used with our PIG Build-A-Berm products
- Adheres to aluminum, brass, steel, stainless steel, concrete, brick, stone, glass, ceramic tile, fiberglass, ABS, PVC, polyester, plywood and more
- Provides superior UV resistance, flexibility and a 30-minute, tack-free cure time
- Resistant to mild solvents, hydrocarbons and oils for worry-free use in industrial applications
- Sealant maintains structural integrity in high humidity; won't foam or bubble when applied

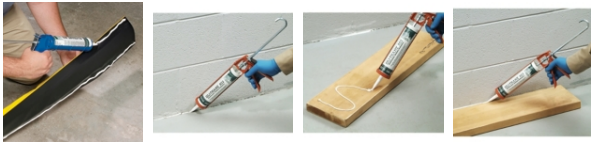

Item#	Description	Dimensions	Weight
PTY340-BK	Black	ext. dia. 2" x 11.25" H	7.65 lbs.
PTY340-WH	White	ext. dia. 2" x 11.25" H	7.65 lbs.

### Metric Equivalent:

Item#	Description	Dimensions	Weight
PTY340-BK	Black	ext. dia. 5.1cm x 28.6cm H	3.5 kg
PTY340-WH	White	ext. dia. 5.1cm x 28.6cm H	3.5 kg

### Specifications

<b>Use With</b>	Metals, Masonry, Glass, Plastics & Wood
<b>Dimensions</b>	ext. dia. 2" x 11.25" H
<b>Brand</b>	Polymeric
<b>Repair Type</b>	Permanent
<b>Temperature Limit</b>	-40°F (-40°C) to 195°F (90°C)
<b>Sold as</b>	6 per box
<b>Weight</b>	7.65 lbs.
<b>NSN (National Stock Number)</b>	PTY340-WH-8030-01-669-3296
<b># per Pallet</b>	250
<b>Composition</b>	Polyether-Based Adhesive
<b>Shelf Life</b>	1 year

UNSPSC

31201606

Volume

10.3 fl. oz. Cartridge

Pigalog® Page Number

Page 169

## Metric Equivalent

Dimensions

ext. dia. 5.1cm x 28.6cm H

Weight

3.5 kg

## Technical Information

### CountryShipOnly

This product can ONLY be shipped to: United States, Chile, Colombia, French Polynesia.

## Technical Documents

Sili-Thane™ 803 Sealant

Sili-Thane? 803 Sealant (White)

Silithane 803 Black Sealant



**New Pig**

World's best stuff for leaks, drips and spills.

**One Pork Avenue • Tipton, PA 16684-0304**

1-855-493-4647 • Fax: 1-800-621-7447 • [newpig.com](http://newpig.com) • [hothogs@newpig.com](mailto:hothogs@newpig.com)