


PIG® Water Hog

WTR203 ext. dia. 3.25" x 10.5" L, Each absorbs up to 26.3 oz., 1 each

Drop a Water Hog into a fuel-tank port for fast absorption of water without absorbing any fuel.

- Removes water from fuel tanks; absorbs water but not fuel
- Prevents frozen fuel lines and gelled fuel
- Combats rust, algae and filter blockage to help prevent premature engine wear and potential failure
- Heavy-duty rip-stop cotton skin with unbreakable plastic casing ensures snag-free use in closed tanks and ports
- Attached string allows easy deployment and retrieval

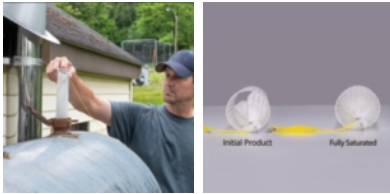

Specifications

Absorbency Range	0 - 0.9 gal.
Dimensions	ext. dia. 3.25" x 10.5" L
Absorbency	Up to 26.3 oz.
Absorbency per	Up to 26.3 oz.
Application	Remove Water From Fuel
Brand	PIG
Clip/Ring	Retrieval Cord - Nylon, Eyelet - Metal
Filler	Sodium Acrylate Copolymer
Fluid Absorbed	Water-Based Liquids Only
Retrieval Line Length	15'
Skin/Outer Mesh	Skin - Cotton, Outer Mesh - Polypropylene
Sold as	1 each
Weight	.6 lbs.
UNSPSC	47131904
Pigalog® Page Number	Page 63

Metric Equivalent

Absorbency per	Up to 777.7 mL
Absorbency	Up to 777.7 mL
Weight	.3 kg
Dimensions	ext. dia. 8.3cm x 27cm L

Technical Information

Technical Documents

[Instructions for PIG Water Hog](#)

[Technical Data Sheet for PIG® Water Hog](#)



New Pig

World's best stuff for leaks, drips and spills.

One Pork Avenue • Tipton, PA 16684-0304

1-855-493-4647 • Fax: 1-800-621-7447 • newpig.com • hothogs@newpig.com