


# Flex Paste® Flood Protection Sleeve

WTR251 For Metals, Masonry, Glass, Plastics & Wood, 1 each



Starts out as a thick paste that can be pushed into seams and openings then dries to a strong, rubberized coating. It seals out water, while remaining flexible.

- Starts out as a thick paste that can be pushed deep into all types of openings and hard-to-reach areas
- Dries to a strong, flexible, rubberized coating
- Once floodwaters recede, Flood Paste can be easily removed
- Should be used on larger areas, flat surfaces or directly on top of other Flood Protection products
- Use on basement windows, pet doors, crawlspaces, seams, windowsills, foundation cracks and more
- Flood Paste will dry to the touch in approximately 2-6 hours and fully cure in approximately 24-48 hours
- Allow product to fully cure before floodwaters arrive
- Flood Paste begins to cure when exposed to the air
- The coverage one coat of the (3) 8.75oz individually wrapped sleeves of Flood Protection Paste, when applied 2 inches wide, is approximately 31 linear feet
- The coverage one coat of the (6) 8.75oz individually wrapped sleeves of Flood Protection Paste, when applied 2 inches wide, is approximately 62 linear feet

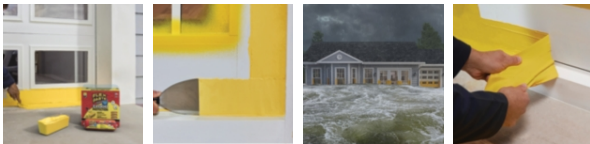

Item#	Description	Dimensions	Weight
WTR251-26OZ	26 oz.		

WTR251-52OZ	52 oz.		
-------------	--------	--	--

## Metric Equivalent:

Item#	Description	Dimensions	Weight
WTR251-26OZ	26 oz.		

WTR251-52OZ	52 oz.		
-------------	--------	--	--

## Specifications

<b>Style</b>	Flood Protection
<b>Use With</b>	Metals, Masonry, Glass, Plastics & Wood
<b>Brand</b>	Flex Seal Family of Products
<b>Temperature Limit</b>	32°F (0°C) to 120°F (49°C)
<b>Sold as</b>	1 each
<b>Composition</b>	Waterproof Paste
<b>Color</b>	Hi-Viz Yellow
<b>UNSPSC</b>	31201606
<b>Pigalog® Page Number</b>	<a href="#">Page N21</a>

## Metric Equivalent

## Technical Information

### Certifications, Approvals and Ratings

UL Listed

### Technical Documents

[Flex Paste Flood Protection \(YLW\)](#)



**One Pork Avenue • Tipton, PA 16684-0304**

1-855-493-4647 • Fax: 1-800-621-7447 • [newpig.com](http://newpig.com) • [hothogs@newpig.com](mailto:hothogs@newpig.com)